





HSF

- NOTES:
- 1.Current Rating:0.3A ;
 - 2.Voltage Rating:30V AC ;
 - 3.Contact Resistance: 90mΩ Max;
 - 4.Withstand Voltage: 100V AC;
 - 5.Insulation Resistance: 50MΩ Min;
 - 6.Operating Temperature: -40℃ to +105℃; 
 - 7.Insulator Material: LCP,G.F,UL94V-0,BK;
 - 8.Contact Material:Copper Alloy;
 - 9.Contact plating:
xxμ" Gold on contact area (See ordering information),
50μ" Nickel underplating overall;


Ordering Information

3630 - S XXX - 019 G1 R 01

- S=Socket
- No.of Pins:
020=20Pin; 024=24Pin;
030=30Pin; 040=40Pin;
050=50Pin; 060=60Pin
070=70Pin; 080=80Pin
- Socket High:
019=1.95mm
- Contact plating:
G1=3μ"Gold
- Packing:R=Tape & Reel
- WCON internal code

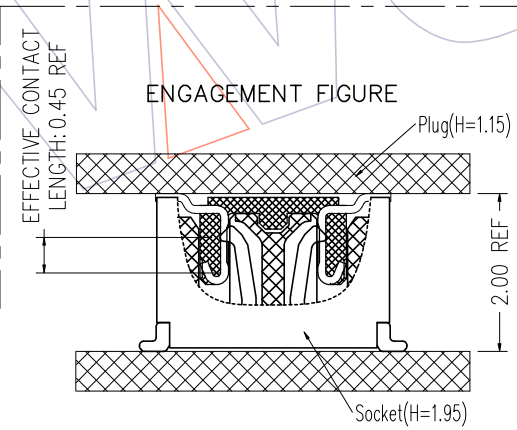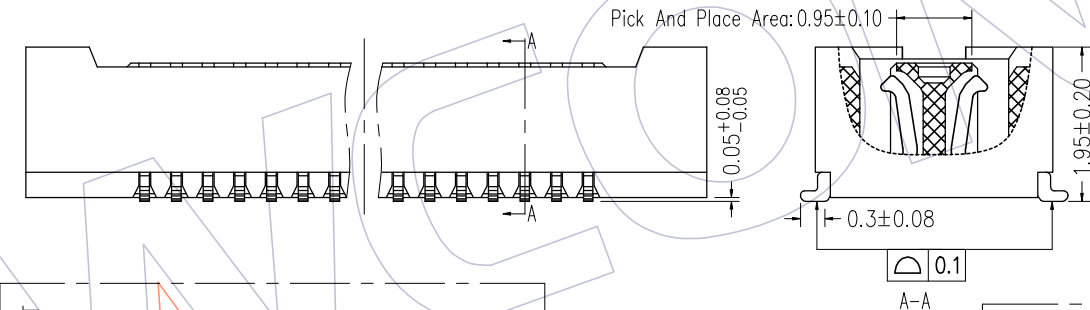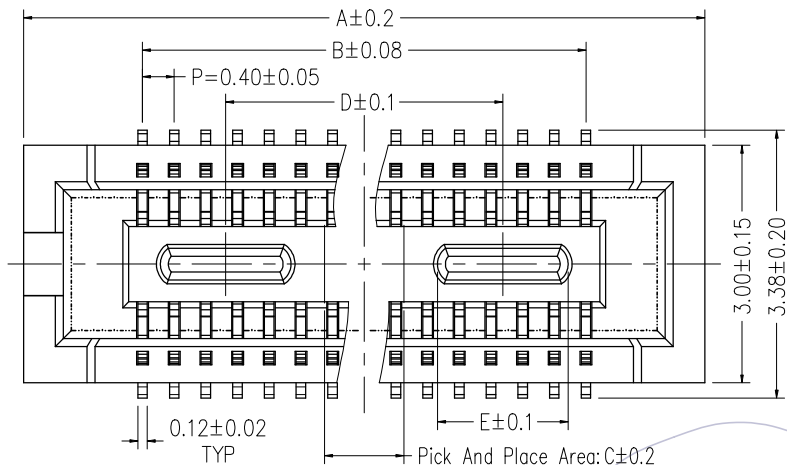

PART NO.	NO.of contacts	A	B	C	D	E
3630-S020-019G1R01	20	6.60	3.60	1.0	2.45	1.05
3630-S024-019G1R01	24	7.40	4.40	1.0	2.55	1.05
3630-S030-019G1R01	30	8.60	5.60	1.5	3.50	1.65
3630-S040-019G1R01	40	10.60	7.60	3.2	5.25	1.65
3630-S050-019G1R01	50	12.60	9.60	3.2	5.45	1.65
3630-S060-019G1R01	60	14.60	11.60	3.2	5.45	1.65
3630-S070-019G1R01	70	16.60	13.60	3.2	6.95	1.65
3630-S080-019G1R01	80	18.60	15.60	3.2	8.95	1.65

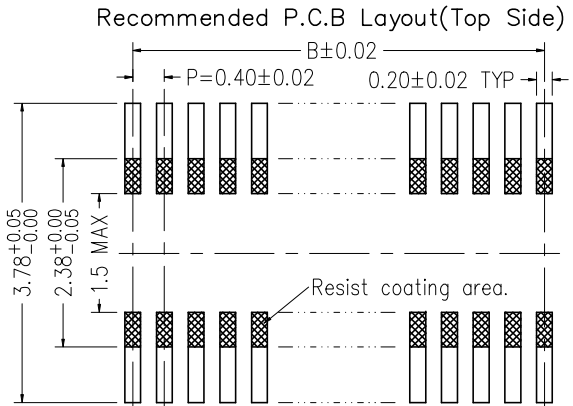

				OPERATION		DRAW OHJ	DATE 2022.02.23	SCALE	FIT	PART NO. 3630-SXXX-019G1R01	WCON Http: www.wcon.com	
A2	2022.02.23	Changes Operating Temperature	OHJ	x.x	±0.40		CHECK	DATE	UNIT			
A1	2021.10.20	Appearance changes based on the product requiremeng	OHJ	x.xx	±0.25	APPROVE			DATE	SIZE	A4	Customer NO.
A0	2019.05.13	NEW	LEVI-LIU	x.xxx	±0.15		Angle ± 3° DIM TOL	SHEET		1/1	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			PROJ.						