

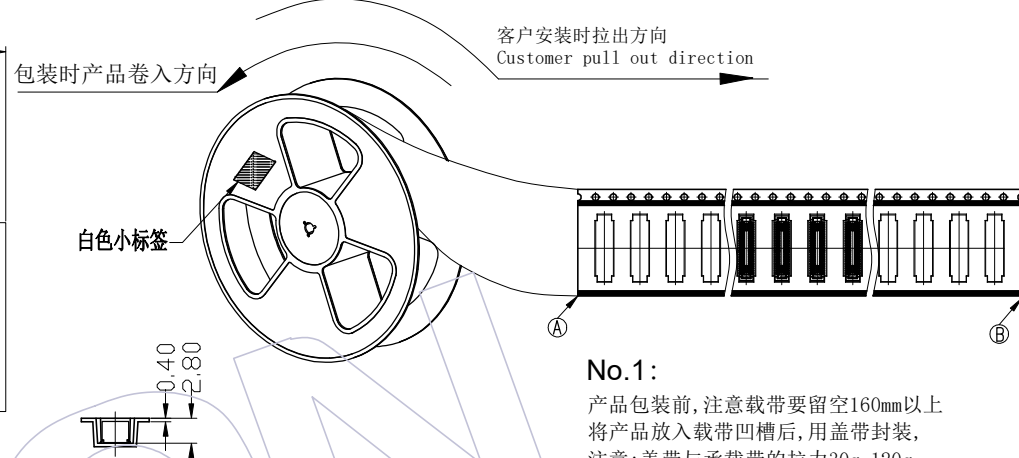



HSF

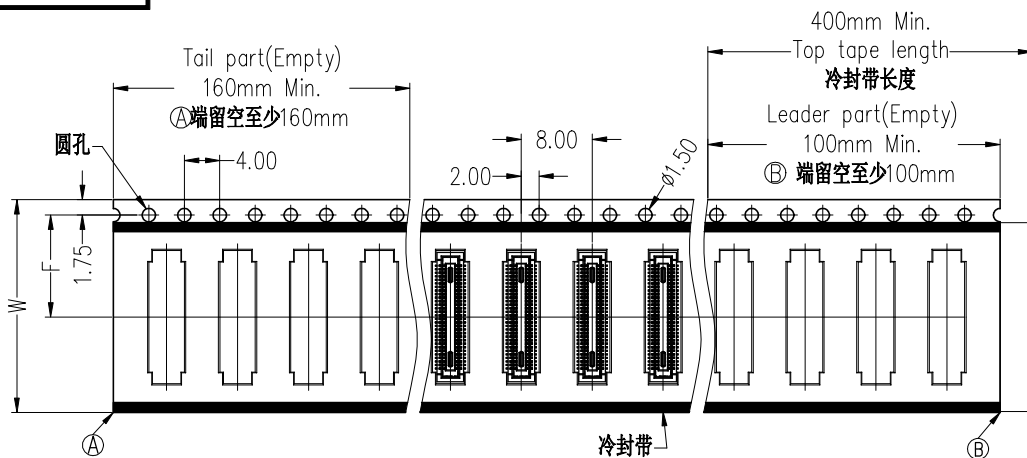

No.1:
产品包装前,注意载带要留空160mm以上
将产品放入载带凹槽后,用盖带封装,
注意:盖带与承载带的拉力30g-120g



外箱: CTN-18K
No.4:
封箱, 打包, 贴标签。

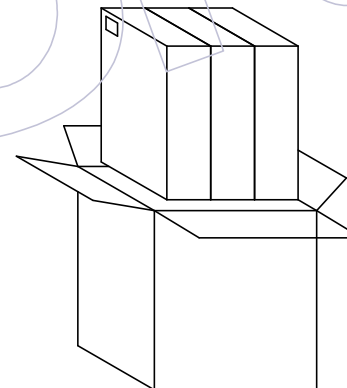

No.2:
将卷盘套上PE-32防水袋,
放入1包干燥剂,
真空机封口后装入内箱,
用封箱胶封装好,并贴上标签。

No.3:
将内箱装入外箱 (3内箱/外箱)
注意统一标签方向

PIN	载带料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
10	TR3630-FN010M02401	16.0±0.30	/	7.50±0.15	2650	10600	31800
20	TR3630-FN020M02401	16.0±0.30	/	7.50±0.15	2650	10600	31800
40	TR3630-FN040M02401	24.0±0.30	/	11.50±0.15	2650	7950	23850
50	TR3630-FN050M02401	24.0±0.30	/	11.50±0.15	2650	7950	23850
60	TR3630-FN060M02401	24.0±0.30	/	11.50±0.15	2650	7950	23850

变更 记录							工程图 ENGINEERING	绘图 DRAW	苏 珊	2021/07/22	SCALE	FIT	WCON WCON ELECTRONICS (GUANGDONG) CO.,LTD	
							X.X	±0.30			UNIT	mm		
							X.XX	±0.20			SIZE	A4		
							X.XXX	±0.10			SHEET	1/1		
	A0	2021/07/22		NEW	-----	-----	Angle	± 2°			PROJ.	品名 TITLE:	料号 PART NO.	3630-SXXX-024XXRXX
	版次 REV	日期 DATE		变 更 说 明 MODIFICATION DESCRIPTION	变 更 CHANGE	核 准 APPROVE	DIM	TOL	核 准 APPROVE				品名 TITLE:	0.4mm Board to Board, XXP, SMT, Female W/T Lock, H=2.45 卷装规范