
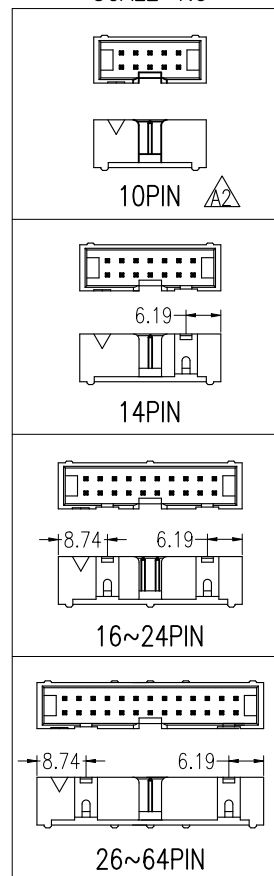

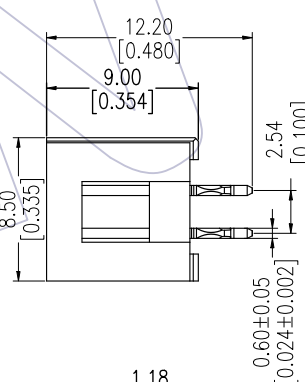
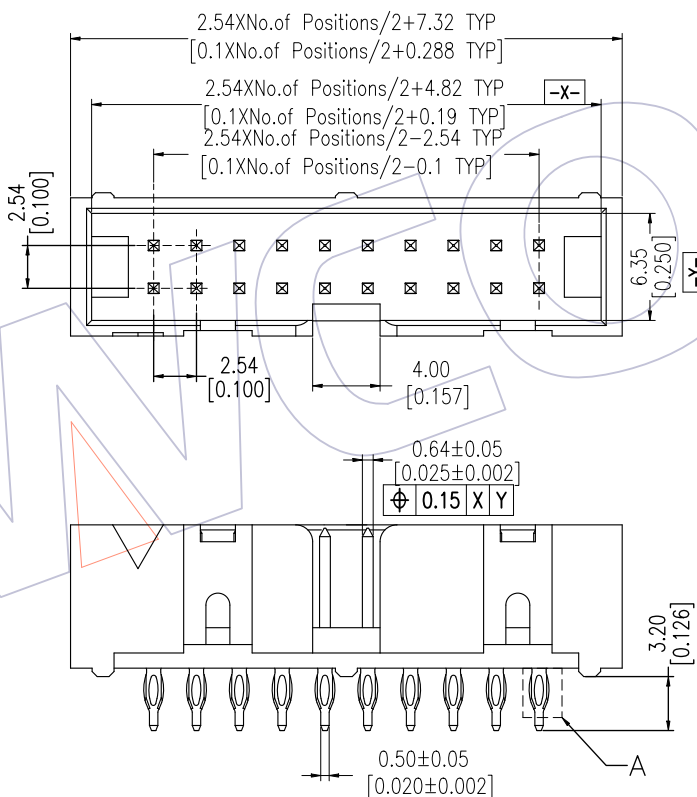
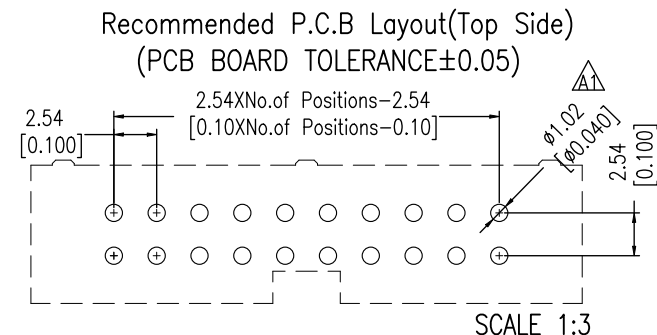


HSF

NOTES:

Current Rating:3AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-55℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PBT+30%G.F(UL94V-0)

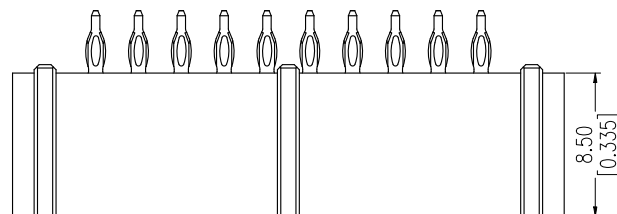

Ordering Information

3113-XX P XX B K00 X 1

No.of Pins	Contact Plating	Color Insulator	Packing:
10P 30P	G0=Gold Flash	B=Black	A=Tray
14P 34P	G3=10u"Gold	U=blue	T=Tube
16P 40P	G4=15u"Gold	G=Gray(427C)	
20P 50P	G5=30u"Gold	E=Gray(413C)	
24P 60P	S0=Gold Flash/Tin		
26P 64P	S1=3u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	
A2	15/03/30	Modify Drawing	—	X.X ±0.40	William Chen	15/03/30	UNIT	mm	3113-XXPXXBK00X1		
A1	2012/07/12	MODIFY PCB HOLE	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	2.54PITCH BOX PRESS FIT TYPE	Customer NO.	
A0	2011/06/27	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1			
				Angle ± 3°			PROJ.				
				DIM TOL							

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com