

HSF

NOTES:




Rated Current:15.0 AMP
Contact Resistance:8.0 milliohm Max
Withstand Voltage:2000 V AC/DC
Insulation Resistance:1000 Megohm min
Operation Temperature: -40℃ to +105℃

Housing Material:PA66+30%GF(UL94V-0)
Contact Material:Brass
Terminal Plating:
Matte Tin Plated Over Nickel



Ordering Information:

P M 750- 1 S XX A SM 3 N

M=Male
Pitch 750=7.50
No. of Pins 02-20P
Contact Plated SM=Matte Tin
Color A=Green
Series No. Blank=W/T WCON
N=W/O WCON

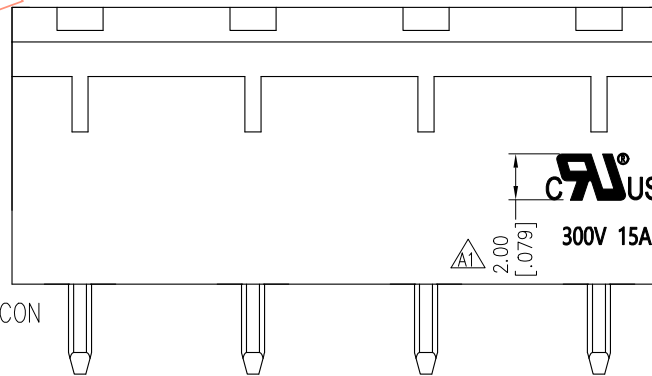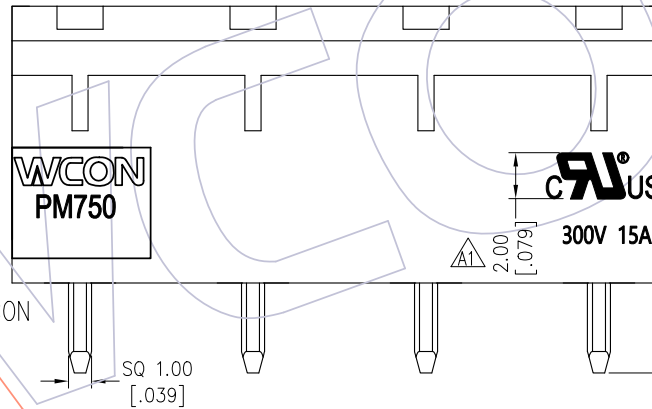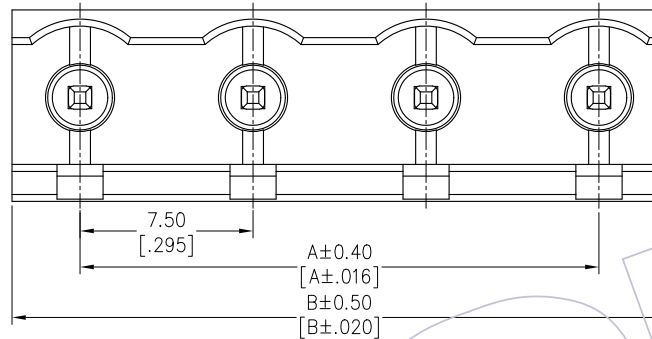

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

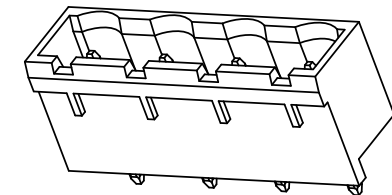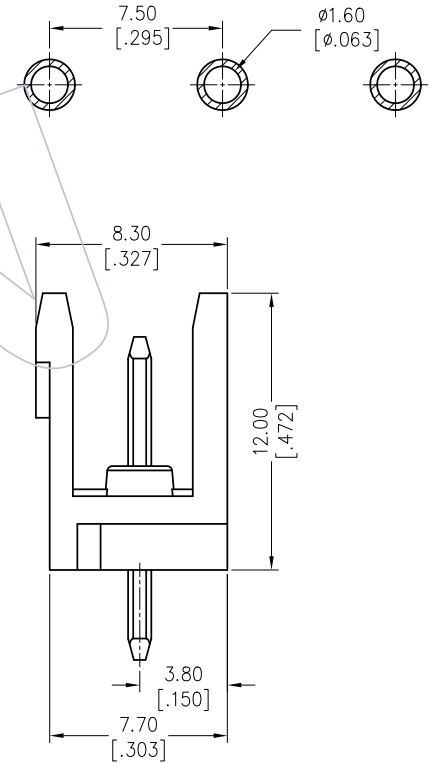

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	7.50	13.40	12	82.50	88.40
03	15.00	20.90	13	90.00	95.90
04	22.50	28.40	14	97.50	103.40
05	30.00	35.90	15	105.00	110.90
06	37.50	43.40	16	112.50	118.40
07	45.00	50.90	17	120.00	125.90
08	52.50	58.40	18	127.50	133.40
09	60.00	65.90	19	135.00	140.90
10	67.50	73.40	20	142.50	148.40
11	75.00	80.90			

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON	
				X.X	±0.40							
				X.XX	±0.25	CHECK	2021/02/23	UNIT	mm	PM750-1SXXASM3(N)△	Http: www.wcon.com	
				X.XXX	±0.15		DATE	SIZE	A4			
A1	2021/02/23	ADD UL Logo;ADD W/O WCON SPEC&P/N		XSR	Angle	APPROVE	DATE	SHEET	1/1	TITLE: 7.50mm Pitch Male Pluggable Terminal Blocks	Customer NO.	
A0	2013/11/06	NEW			± 3'			PROJ.	1/1			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com