

HSF

NOTES:

Rated Current:3A

Contact Resistance:20mΩ max

Withstand Voltage:1000V AC/Minute



Insulation Resistance:1000MΩ min

Operation Temperature: -40℃ to+105℃

Contact Material:Brass

Contact plating:Au Or Sn Over Ni

Insulator Material:PA66(UL94V-0)

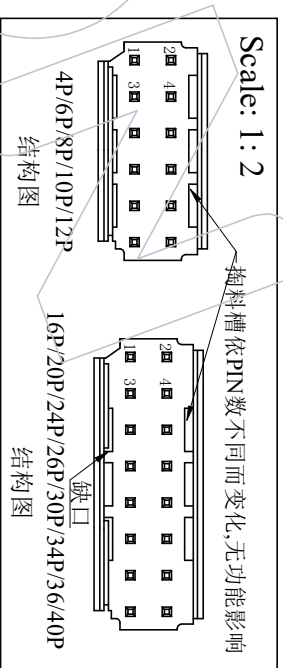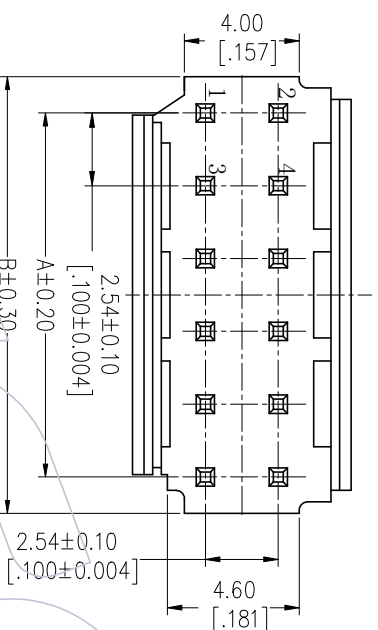


Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2547-2WS02XX1	2.54	5.08
2x03	WF2547-2WS03XX1	5.08	7.62
2x04	WF2547-2WS04XX1	7.62	10.16
2x05	WF2547-2WS05XX1	10.16	12.70
2x06	WF2547-2WS06XX1	12.70	15.24
2x08	WF2547-2WS08XX1	17.78	20.32
2x10	WF2547-2WS10XX1	22.86	25.40
2x12	WF2547-2WS12XX1	27.94	30.48
2x13	WF2547-2WS13XX1	30.48	33.02
2x15	WF2547-2WS15XX1	35.56	38.10
2x17	WF2547-2WS17XX1	40.64	43.18
2x18	WF2547-2WS18XX1	43.18	45.72
2x20	WF2547-2WS20XX1	48.26	50.80

Ordering Information

WF2547 - 2 WS XX XX X X 1

No. of Row Dual Row No. of pins 02P-20P Contact Plating S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold Blank=Tin Color W=White U=Blue B=Black Packing 0=PE Bag T=Tube

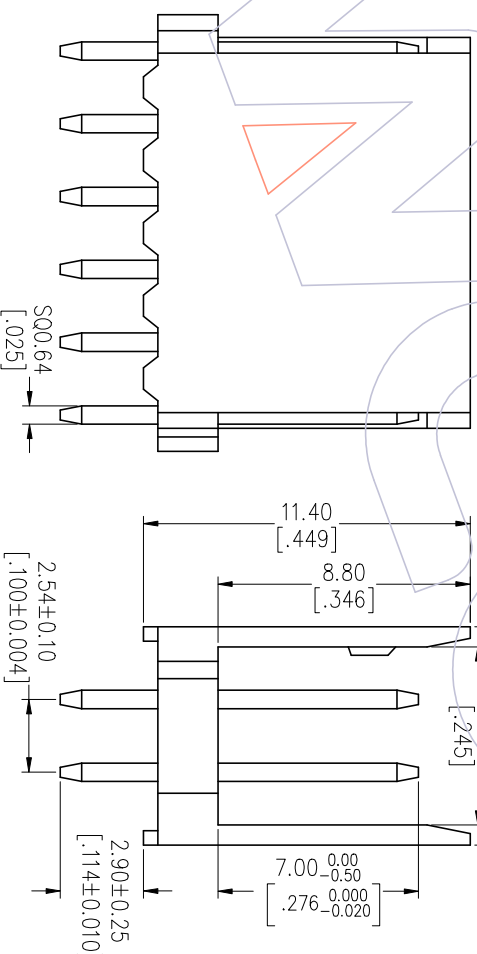

Circuit	Part No.	Dimension	
		A	B
2x02	WF2547-2WS02XX1	2.54	5.08
2x03	WF2547-2WS03XX1	5.08	7.62
2x04	WF2547-2WS04XX1	7.62	10.16
2x05	WF2547-2WS05XX1	10.16	12.70
2x06	WF2547-2WS06XX1	12.70	15.24
2x08	WF2547-2WS08XX1	17.78	20.32
2x10	WF2547-2WS10XX1	22.86	25.40
2x12	WF2547-2WS12XX1	27.94	30.48
2x13	WF2547-2WS13XX1	30.48	33.02
2x15	WF2547-2WS15XX1	35.56	38.10
2x17	WF2547-2WS17XX1	40.64	43.18
2x18	WF2547-2WS18XX1	43.18	45.72
2x20	WF2547-2WS20XX1	48.26	50.80

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: sales@wcon.com

OPERATION

±0.40

±0.25

±0.15

± 3°

Angle

± 3°

± 3°

DRAW JYHuang

DATE 2012/09/08

CHECK

DATE

DATE

DATE

DATE

SCALE

UNIT

mm

A4

1/1

PROJ.

PROJ.

PART NO.

SEE TAB

TITLE:

"T" TYPE 2.54 WAFER 180° DUAL ROW

Customer NO.

Customer NO.

Customer NO.

Customer NO.